


Active Speaker System

CSJ-05A

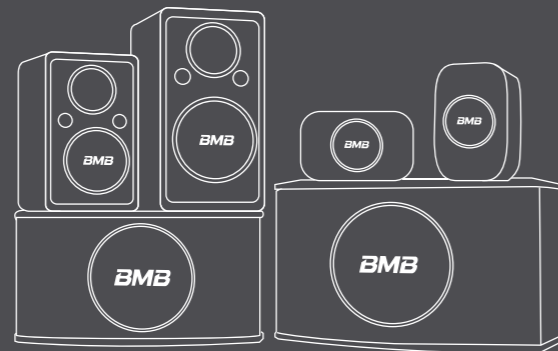


Surprising power packed in compact **BMB**

Music

40W built-in amplifier
4.5-inch compact Bluetooth speaker

Karaoke

Mic input Echo is included
Enjoy singing

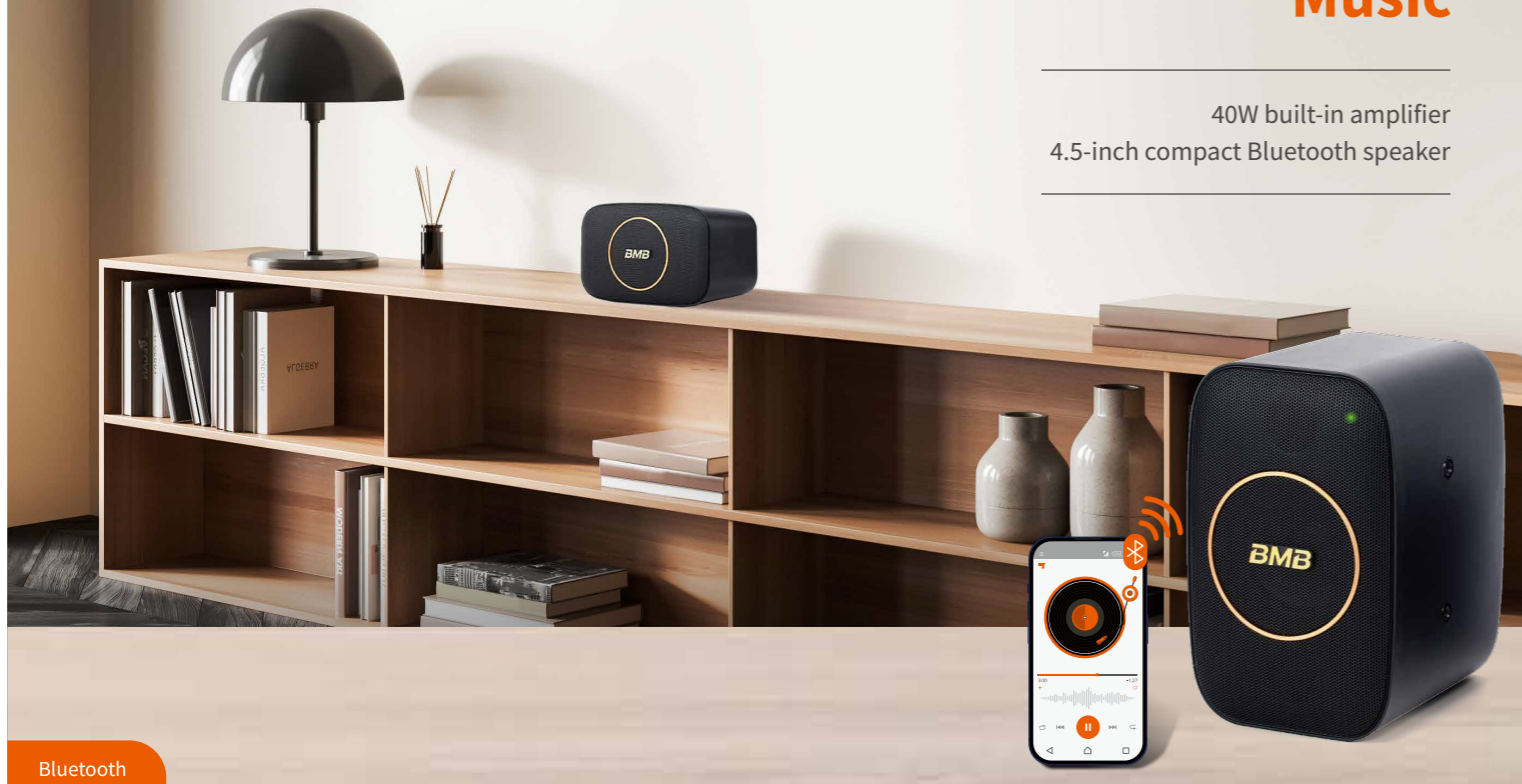


Bluetooth


*Microphone sold separately Green Light | Power indicator

TWS Wireless link

Realize wireless link
between couple of CSJ-05A

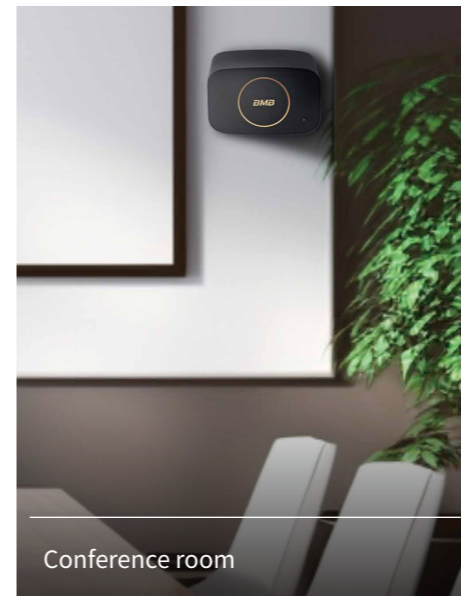

Conference room

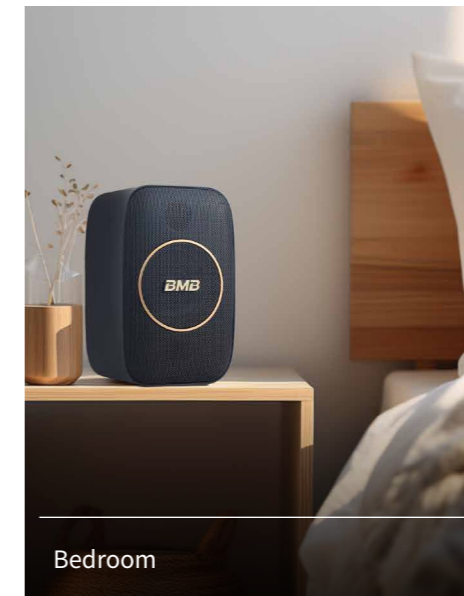

Bedroom



Coffee shop



More music scene

Living room, bedroom, coffee shop, conference room ...
Use as PC speaker, an external speaker for smartphone, tablet and so on.

Multiple installation choices

Supports vertical and horizontal set up.
BMB logo can be rotated.

CSJ-05 SERIES Setup Example

More options for your entertainment



CSJ-05A
Active speaker system



CSJ-05
Speaker system



Enjoy surprising power

- ♥ Karaoke
- ♥ Live streaming

A 1ch compact system

CSJ-05A 40W x 1ch

1pc of CSJ-05A, wireless microphone WH-210.
Easy to setup, plug and sing!




Basic stereo sound

- ☑ Listen music
- ☑ External stereo for PC

B 2ch stereo system

CSJ-05A 40W x 2ch

2 pcs CSJ-05A,
wireless linked by TWS function.

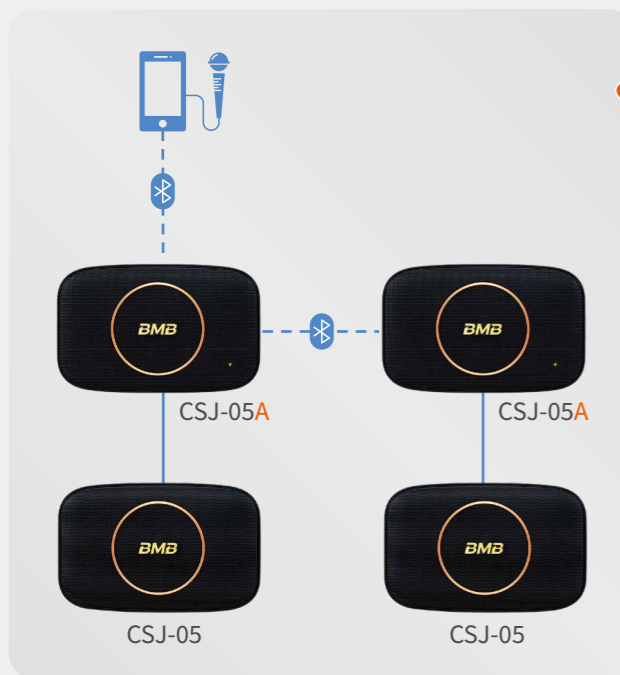

Large space use

- ☑ Coffee shop / restaurant
- ☑ Office
- ☑ Entertainment room

C 4ch basic system

CSJ-05A + CSJ-05

One CSJ-05A can link with another CSJ-05A wirelessly via Bluetooth,
and each CSJ-05A can be connected to one CSJ-05 externally.



High power for commercial use

- ☑ Coffee shop / restaurant
- ☑ Office
- ☑ Entertainment room

D 4ch High power system

CSJ-05 x 4ch, DAR-350HD4



Also can be set up as basic speaker wiring style,
Combined with DAR-HD Series amplifier,
CSW Series active subwoofer.

CSJ-05A


Specifications



System type	Full range active speaker system	
Frequency range(-10dB)*1	75Hz-18kHz	*1 Full space (4) conditions
System power	40W+40W	
Product size	157mm x 247.5mm x 188.6mm (H x W x D)	
Net weight	3kg (6.6lbs)	
Connection port	Audio input/output (RCA) Speaker output (CSJ-05 only) Microphone input(TS,unbalanced)	
Units	Full range unit: 116mm (4.5") cone, 25.5mm (1") voice coil x1	
Control panel	Main volume Stereo/mono R/L balance Microphone gain Echo level	
Indicator light	Power on (green LED)	
Bluetooth	Bluetooth on (blue LED)/TWS (green LED) Version 5.3 Range: up to 9m (30ft)	
Input voltage	100-240V / 50-60Hz	
Box material	5mm (0.196") ABS	

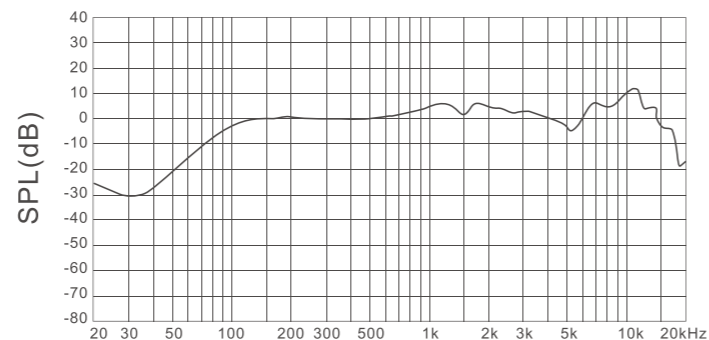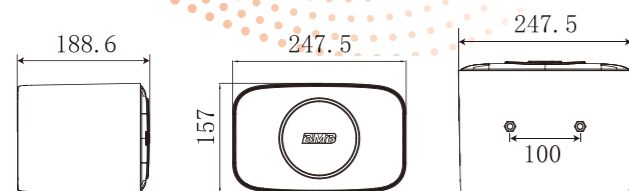

Introduction to rear panel

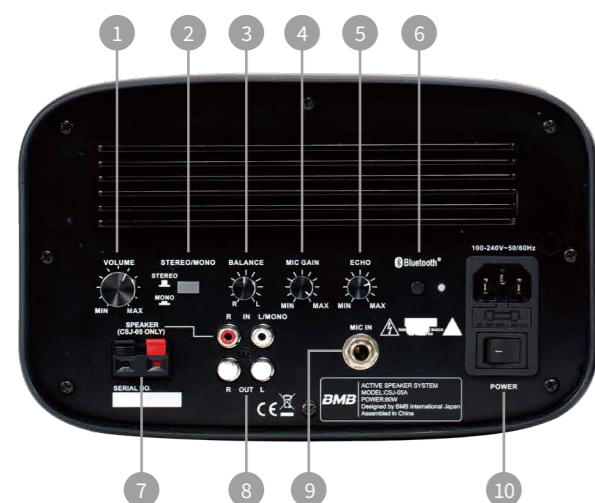

1. Master volume knob
2. Stereo/mono switch button*1
3. R/l balance knob
4. Microphone volume knob
5. Effect volume knob
6. Bluetooth switch (short press to turn off/on, long press to turn on/off TWS function)
7. Speaker output connector (CSJ-05 only)
8. Audio signal input/output (RCA)
9. Microphone input (TS, unbalanced)
10. Power switch

*1 Stereo Mode
By link with additional CSJ-05/05A, it can be set into Stereo Mode.


CSJ-05

Specifications




System Type	Full range speaker	
Frequency Range(-10dB)*1	62Hz-18kHz	*1 Full space (4) conditions
Sound Pressure Level*2	82dB	*2 1w1m on-axis, swept-sine in anechoic environment
Impedance	8Ω	
Power Capacity	Continuous 60W, Program 120W	
Dimensions	157mm x 247.5mm x 188.6mm (H x W x D)	
Net Weight	2.64kg (5.82lbs)	
Input Connectors	12mm (spacing distance) terminal	
Full Range Speaker	116mm (4.5") Cone, 25.5mm (1") Voice Coil x 1	
Cabinet Material	5mm (0.196") ABS	

SOUND PRESSURE LEVEL FREQUENCY RESPONSE

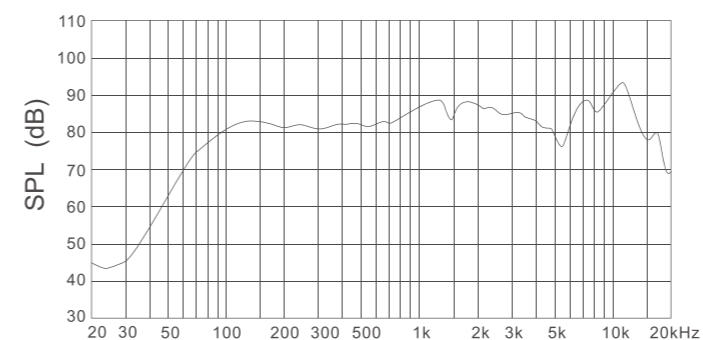

IMPEDANCE FREQUENCY RESPONSE

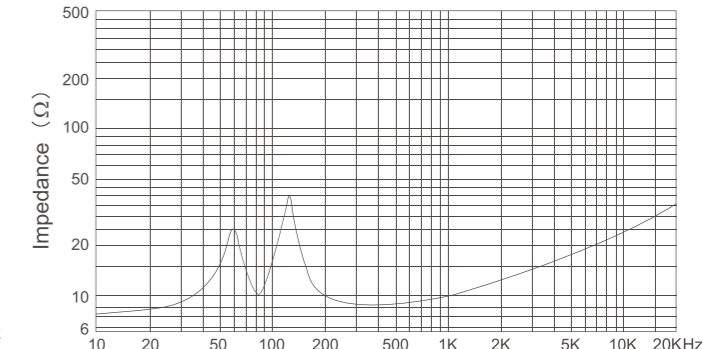


Matching recommendations



DAR-350HD4

Karaoke A/V amplifier

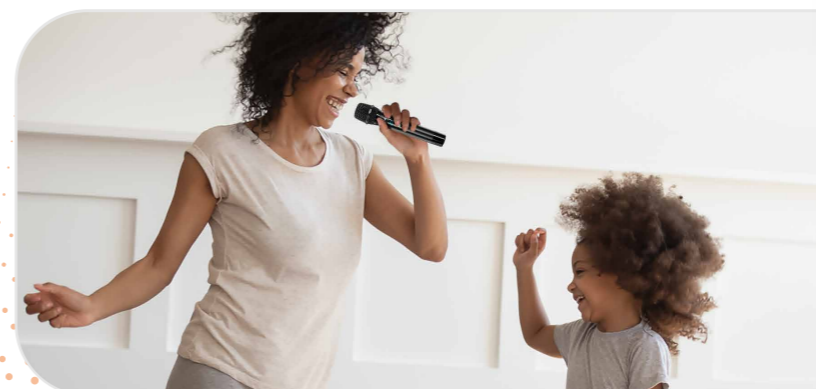

WH-210

Wireless microphone

