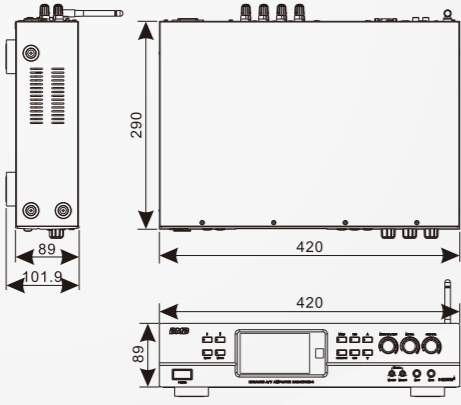
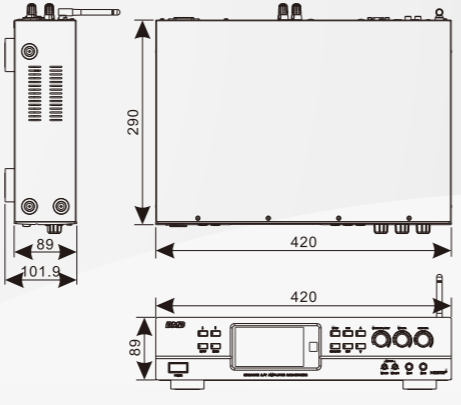


## TECHNICAL PARAMETERS

Karaoke A/V Amplifier parameter comparison table

Parameter items	Standard conditions	DAR-350HD4	DAR-350HD2	DAR-200HD
Stereo mode	@ 8Ω 1kHz	2×350W/4×175W	2×350W	2×200W
Sensitivity	@ 8Ω 1kHz	800mV/560mV	800mV	620mV
Frequency Response	20Hz-20kHz	±0.5dB		
Total Harmonic Distortion	@ 8Ω 1kHz, MIC input	0.05%		
	@ 8Ω 1kHz, AUX/KARAOKE input	0.05%		
Signal to Noise Ratio	A-weighted, MIC input	≥85dB		
	A-weighted, MIC mute, AUX/KARAOKE input	≥96dB		
Intermodulation distortion	@ 8Ω 60Hz-7kHz	<0.1%		
Voltage gain	@ 8Ω 1kHz	36±1dB/34±1dB	36±1dB	36±1dB
Channel separation	@ 8Ω 1kHz	≥78dB		
Input Impedance	@ 1kHz balance	20kΩ		
AC power specifications		AC100V-130V (50/60 Hz) 100V Model AC220V-240V (50/60 Hz) 200V Model		
Structure diagram	DAR-350HD4:	DAR-350HD2/DAR-200HD:		
				
Product dimensions (W*D*H)	420mm x 290mm x 89mm			
Packaging dimensions (W*D*H)	561mm x 470mm x 175mm			
Net weight	10.5kg(DAR-350HD4)	10.2kg(DAR-350HD2/DAR-200HD)		
Gross Weight	13kg(DAR-350HD4)	12.7kg(DAR-350HD2/DAR-200HD)		


\* Specifications are subject to change without notice.

# BMB

BMB International Japan

# KARAOKE A/V AMPLIFIER

**DAR-HD SERIES**

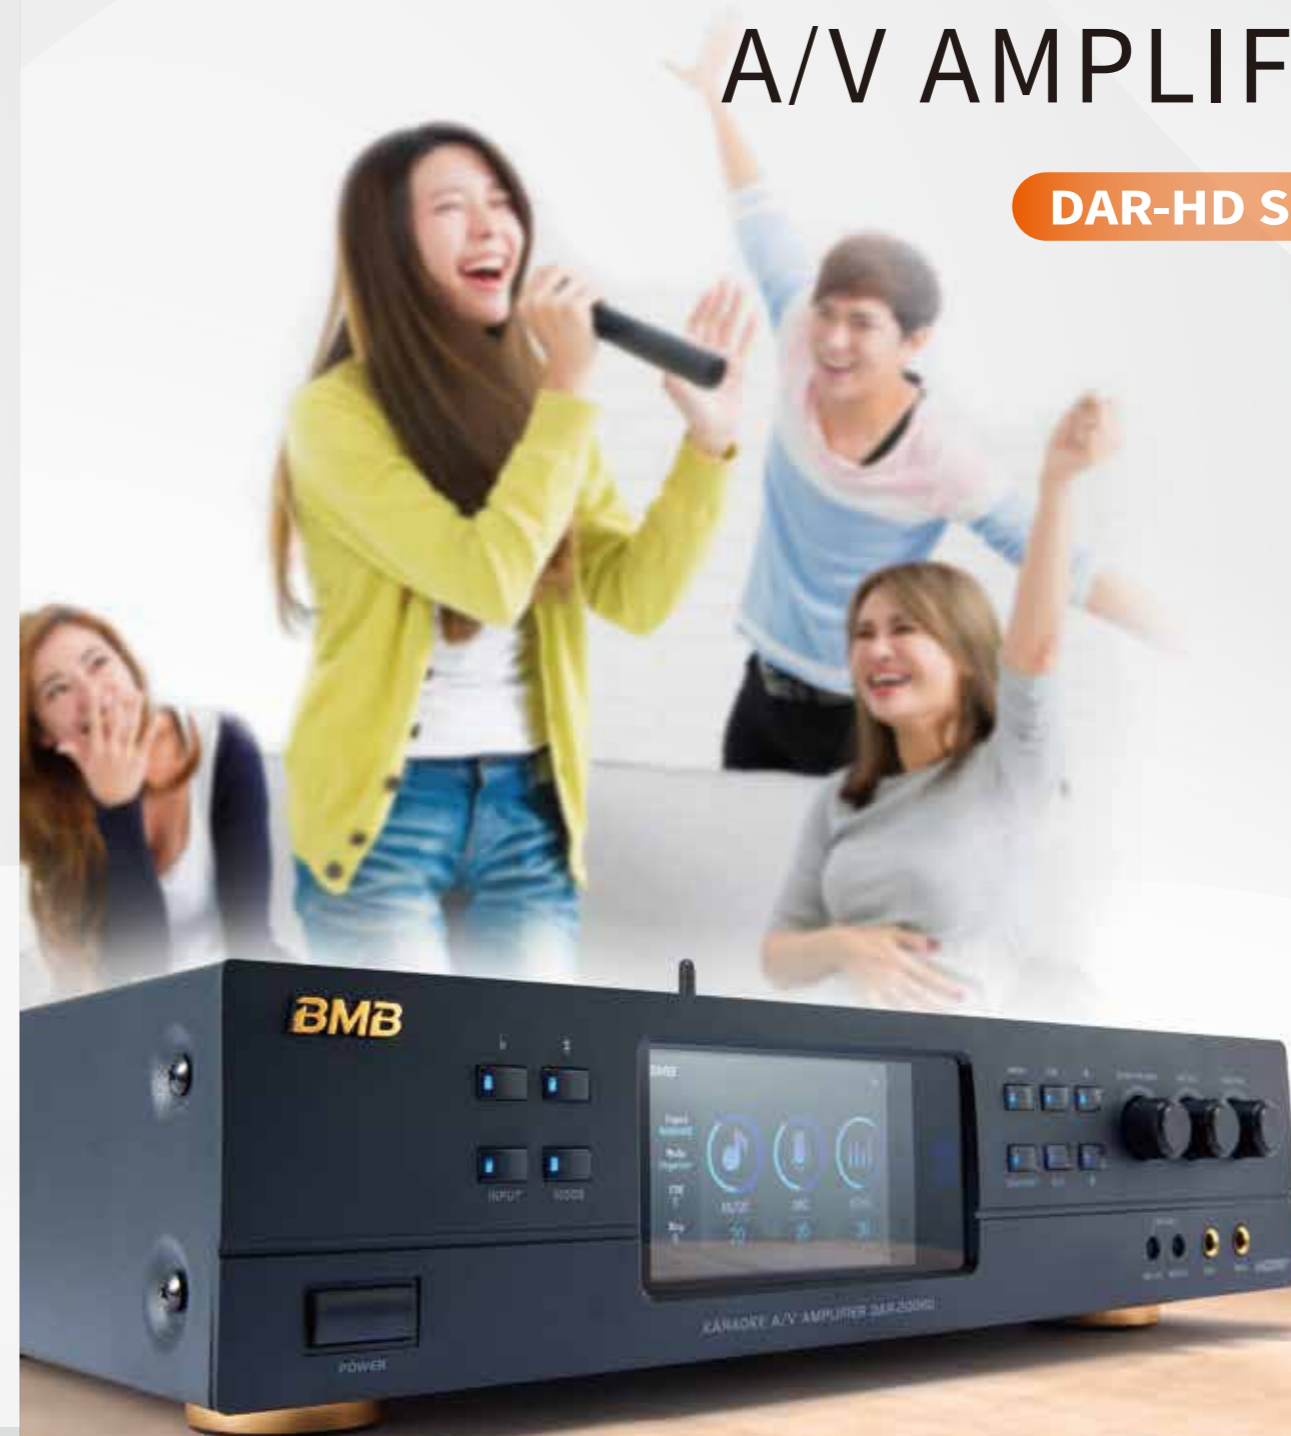

# BMB

BMB International Japan [www.bmb.com](http://www.bmb.com)

Address: Shiba Park Bldg. B-Kan, 8<sup>th</sup> Floor, 2-4-1, Shiba-Park,  
Minato-Ku, Tokyo, 105-0011, Japan  
Tel: +81-50-5814-1068 +86-21-6448-3280



**Multichannel**  
music and Karaoke space,  
easily achieved!

**DAR-350HD4**  
4CH Support!

**3 models** to meet different needs  
Create a private music and Karaoke space

**DAR-350HD4**  
4CH × 175W  
2CH × 350W

**DAR-350HD2**  
2CH × 350W

**DAR-200HD**  
2CH × 200W

**Make you a superstar**  
with **BMB** pro sound tech



**7 Features**



**DSP**

Rich DSP processing functions  
including volume, HPF&LPF, key change,  
noise gate, anti-feedback, parameter  
equalization, echo, reverberation effect  
processing and other functions



**GUI**

RS232 interface,  
PC connection control



**APP Control**

Bluetooth connection and  
supports part parameters control



**4.3" Display**

4.3" LCD color display



**FBE**

ANTI-FEEDBACK



**4 Preset Modes**

4 preset modes,  
and 1 custom mode



**Double Bluetooth**

Enjoy two devices alternately



(RMR-HD)



OPTICAL

**Input/Output**

- 4 mic input
- 2 analog input(Karaoke/AUX)
- 1 OPTICAL input
- 1 bluetooth input
- 2 HDMI IN, 1 HDMI OUT(ARC)
- 1 Pre/Sub.W+Cent output



**Step 1 :**  
Search the Bluetooth  
"BMB DAR-350HD4"

**Step 2 :**  
Click the name and  
pairing with the device.

**Step 3 :**  
Play music with the device.